

Model: DE120D6

Powered by DEUTZ





Generator Specification

Service	PRP (1)	ESP ₍₂₎
Power (kVA)	112	120
Power (kW)	89.6	96
Rated speed (r.p.m)	18	00
Standard voltage (V)	220/	127V
Rated at power factor(cos phi) O	.8



AGG Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery safety.
- 2006/95/EC Low voltage
- EN 60204-1: 2006+A1: 2009, EN ISO 12100: 2010, EN ISO 13849-1: 2008, EN 12601 : 2010

(1) PRP (Prime Power):

According to ISO8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power):


According to ISO 8528-1, It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. No overload capability is available.

Powers	ES	Р	PF	¦ ₽	Standby
Voltage (V)	KVA	KW	KVA	КW	Amps
480/277	120	96	112	89.6	144.3
440/254	120	96	112	89.6	157.4
380/220	120	96	112	89.6	182.3
220/127	120	96	112	89.6	314.9
208/120	120	96	112	89.6	333.0

Performance Data			
Model		DE110D6	
Er	igine brand	Deutz	
Er	igine model	BF4M1013EC G1	
Spee	d control type	Mechanical	
Phase		3	
Control system		Digital	
Starter motor voltage		12	
Frequency		60HZ	
Engine speed (RPM)		1800	
	100% standby power	-	
Fuel Consumption (L/H)	100% prime power	25.1	
	75% prime power	18.8	
	50% prime power	12.8	

Standard reference Conditions

Note: Standard reference condition 25 $^\circ$ (77 $^{\rm F}$) air inlet temp, 100m(328ft) A.S.L 30% relative humidity. Fuel consumption dat with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 , Class A2



Dimension and Weight			
Dimension	Open	Silent	
Length (L)	2195mm	3050mm	
Width (W)	1040mm	1100mm	
Height (H)	1670mm	1832mm	
Net Weight	1180KG	1765KG	
Fuel Tank (L)	210L	190L	

Note: This parameters allows for some acceptable deviations.



Engine Specification: BF4M1013EC G1

Basic technical data		
No. of cylinders	4	
Cylinder arrangement	In-line	
Cycle	4 stroke	
Injection system	Single injection pumps	
Displacement	4.764 L	
Bore	108 mm	
Stroke	130 mm	
Compression ratio	19:1	
Mean effective pressure	13.3 bar	
Piston speed	7.8 m/s	
Rotation	CCW	
Engine dry, w/o cooling system	n 526kg	

Output	
Gross output (LTP)	95 KW
Fan reduction	10.2 KW
Net flywheel	84.8 KW
Electrical output	76 KVA
Gross output (PRP)	90.0 KW
Gross output (Continous power)	86.0 KW

I

Lubrication system	
Oil specification	TR0199-99-1217
Oil consumption	
(as % of fuel consumption)	0.3
Oil capacity (sump)	11 L
Min. oil pressure (warning)	2.9 bar
Min. oil pressure (shut down)	2.2 bar
Max. permissible oil temp(oil pa	n) 130 °C

Cooling system		
Delivery of coolant pump	12.3m³/h	
Min. pressure before coolant pump	0.3 bar	
Coolant capacity(engine)	7.4 L	
Coolant capacity (incl. cooling unit)	19.7 L	
Air to boil	62 °C	
Fan power consumption	10.2 KW	
Cooling air flow	7600 m³/h	
Air pressure loss, external	2.0 mbar	
Heat balance		
Heat dissipation (engine radiator)	51.8 KW	
Heat dissipation (CAC)	17.3 KW	
Heat dissipation (Convection)	9.5 KW	


12V
3 KW
55A


Inlet / Exhaust Data	
Max. intake depression(switch setting)	25 mbar
Combustion air volume	424.5 m³/h
Max. exhaust back pressure	30 mbar
Max. exhaust gas temperature	490 ℃
Exhaust gas flow (at above temp)	1160 m³/h
Exhaust flange/pipe diameter	TBD




Alternator Specification

Alternator		
Number of phase	3	
Power factor (Cos Phi)	0.8	
Poles	4	
Winding Connections (standard	d) Star-serie	
Terminals	12	
Insulation type	H class	
Winding Pitch	2/3	
IP rating	IP23	
Excitation system	Self-excited	
Bearing	Single bearing	
Coating	Vacuum impregnation	
Voltage regulator	A.V.R	
Couping	Flexible disc	



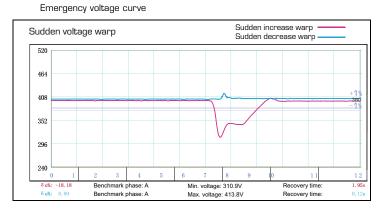

Emergency frequency curve

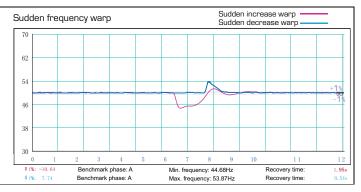

Options

Engine	Alternator	Generator Sets	Fuel System
Water Jacket Pre-heaterFuel heater	 Winding Temp measuring Instrument Alternator Pre-heater PMG Anti-damp and anti-corrosion treatment Anti-condensation heater Winding and bearing RTD 	 Tools with the machine Extended range fuel tank Bunded fuel tank 	 Low fuel level alarm Automatic fuel feeding system Fuel T-valves
Canopy	Lub oil system	Cooling System	Control Panel
Rental type CanopyTrailer	 Oil Pre-heater Oil temp sensor 	• Front heat protection	 Remote control panel ATS Synchronizing controller Adjustable earth leakage relay



Control Panel

Configuration

- Emergency stop button
- Protection MCB
- Battery charger
- Integrated aviation plug
- ATS connection
- Digital control module

Features

- 3 phase generator set monitoring
- Support of engines equipped with electronic control unit
- Comprehensive diagnostic message
- Automatic or manual start/stop of the gensets
- Push buttons for simple control, lamp test
- Graphic back-lit LCD display
- Parameters adjustable via keyboard or PC
- Mains measurements (50HZ/60HZ)
- Generator measurements (50HZ/60HZ)
- Comprehensive shutdown or warning on fault condition
- 3 phase Generator protections
 - Over-/under voltage
 - -Over-/under frequency
 - -Current/voltage asymmetry
- -Over current/overload
- 3 phase AMF function
- Over-/under frequency
- Over-/under voltage
- Voltage asymmetry
- Configurable analog inputs
- Battery voltage, engine speed (pick-up) measurement
- Configurable programmable binary inputs and outputs
- Warm-up and cooling functions
- Generator C.B. and Mains C.B. control with feedback and return timer
- RS232 interface
- Modem communication support
- Hours counter
- Sealed to Ip65
- Event log



AGG UK | AGG China | AGG USA | AGG UAE

info@aggpower.co.uk | www.aggpower.co.uk

- f Follow us @facebook.com/aggpowergroup
- in Follow us @linkedin.com/company/agg-power
- Follow us @ AGGPOWER

$\label{eq:alpha} All information in the document is substantially correct a the time of printing but may be subsequently altered by the company.$

Benefits

- Less wiring and components
- Integrated solution
- Less engineering and programming
- User friendly set-up and button layout
- Module can be configured to suit individual applications
- PC software for simplified configuration
- Wide range of communication capabilities

Operation conditions

- Operation temp: -20 $^\circ\!C$ to + 70 $^\circ\!C$
- Storage temp: -30 °C to + 80 °C
- Operating humidity: 95% w/o condensation
- Vibration : 5-25Hz, ± 1.6 mm
 - 5-100Hz, a=4g
- Shocks: a= 500m/s²

Options

- Ethernet interface (Remote monitoring and control)
- GSM modem/wireless internet (Remote monitoring and control)
- RS232-RS485 Dual port interface
- Synchronizing control panel
- Distribution board with sockets kit and power busbar
- Battery trickle charge ammeter
- Earth leakage protection
- Earth fault protection
- Low fuel level alarm
- Low fuel level shutdown
- High fuel level alarm
- Fuel transfer system control
- Low coolant level shutdown
- High lube oil temp shutdown
- Overload via alarm switch on breaker
- Engine coolant heater controls
- Control panel heater
- Speed adjust switch
- Oil temp displayed on LCD screen
- Additional 8 inputs and outputs

Distributed by