

Model: P16.5D5

Powered by PERKINS



Generator Specification

Service	PRP ⁽¹⁾	ESP ⁽²⁾
Power (kVA)	15	16.5
Power (kW)	12	13
Rated speed (r.p.m)	1500	
Standard voltage (V)	400/230V	
Rated at power factor(cos phi)	0.8	



AGG Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery safety.
- 2006/95/EC Low voltage
- EN 60204-1: 2006+A1: 2009, EN ISO 12100: 2010, EN ISO 13849-1: 2008, EN 12601 : 2010

(1) PRP (Prime Power):

According to ISO8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power):

According to ISO 8528-1, It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. No overload capability is available.


Powers Voltage (V)	ESP KVA	ESP KW	PRP KVA	PRP KW	Standby Amps
415/240	16.5	13	15	12	23.0
400/230	16.5	13	15	12	23.8
380/220	16.5	13	15	12	25.1

Performance Data

Model	P16.5D5	
Engine brand	Perkins	
Engine model	403A-15G2	
Speed control type	Mechanical	
Phase	3	
Control system	Digital	
Starter motor voltage	12V	
Frequency	50HZ	
Engine speed (RPM)	1500	
Fuel Consumption (L/H)	100% standby power	5.04
	100% prime power	4.3
	75% prime power	3.11
	50% prime power	2.24

Standard reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp, 100m(328ft) A.S.L 30% relative humidity. Fuel consumption dat with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 , Class A2



Dimension and Weight

Dimension	Open	Silent
Length (L)	1450mm	1870mm
Width (W)	550mm	730mm
Height (H)	1190mm	1136mm
Net Weight	-	670KG
Fuel Tank (L)	75L	80L

Note: This parameters allows for some acceptable deviations.

■ Engine Specification: 403A-15G2

Basic technical data	
No. of cylinders	3
Cylinder arrangement	In-line
Cycle	4 stroke
Induction system	Naturally aspirated
Compression ratio	22.5:1
Bore	84mm
Stroke	90mm
Displacement	1.496L
All ratings certified to within	± 5%
Estimated total weight	179kg

Cooling system	
Total coolant capacity	
-with radiator	6.0L
-without radiator	2.6L
Maximum top tank temp	112°C
Thermostat operation range	82-95°C
Radiator face area	0.167 m²
Rows and material	2 rows aluminium
Pressure cap setting	90 kPa
Fan diameter	320,0 mm
Drive ratio	1.25 : 1
Number of blades	6

Fuel system	
Injection system	Indirect
Fuel injection pump	Cassette type
Fuel atomiser	Pintle nozzle
Nozzel opening pressure	14,7 MPa
Fuel lift pump type	Mechanical
- flow/hour	63 l/h
- pressure	10 kPa
Maximum suction head:	
-1500 rev/min	3m

Induction system	
Clean filter	3.0kpa
Dirty filter	6.4kpa
Air filter type	Dry


Lubrication system	
Maximum sump capacity	6.0L
Minimum sump capacity	4.5L
Total system	-
Maximum engine operating angles	
-front up, front down, right side	
or left side	35°C
Lubricating oil pressure	
-Relief valve opens	262-359 kPa
Normal oil temperature.	125°C
oil flow at rated speed	10.9 litres/min.

Electrical system	
Type	Negative ground
Alternator voltage	12 volts
Alternator output	15 amps
Starter motor voltage	12 volts
Starter motor power	2KW


General installation	Prime power
Gross engine power	14kW
Brake mean effective pressure	746kPa
Combustion air flow	1.0m³/min
Exhaust gas temperature outlet	470°C
Energy to coolant	13.3kW
Energy to exhaust	10.7kW

■ Alternator Specification


Alternator	
Number of phase	3
Power factor (Cos Phi)	0.8
Poles	4
Winding Connections (standard)	Star-serie
Terminals	12
Insulation type	H class
Winding Pitch	2/3
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Couping	Flexible disc

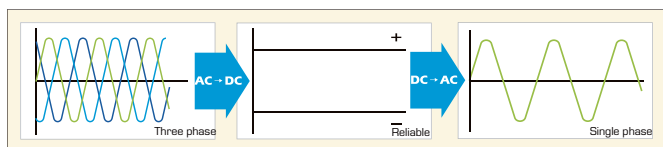

Emergency voltage curve

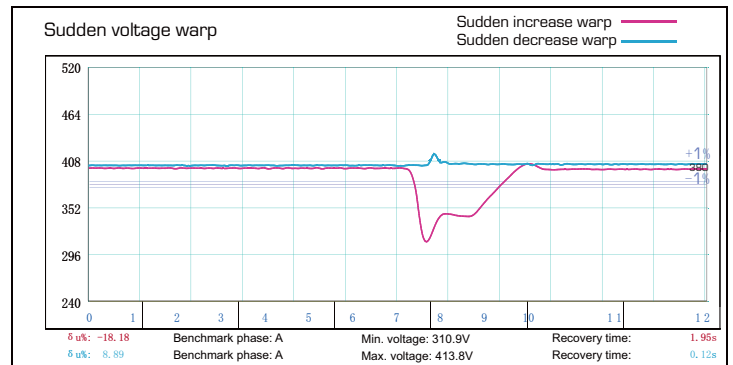

Emergency frequency curve

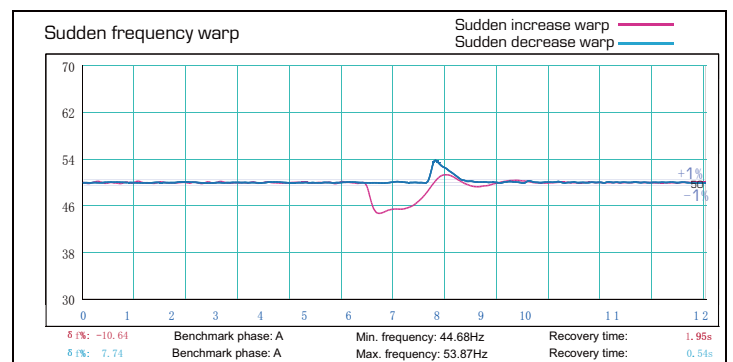

■ Options

Engine	Alternator	Generator Sets	Fuel System
<ul style="list-style-type: none"> Water Jacket Pre-heater Fuel heater 	<ul style="list-style-type: none"> Winding Temp measuring Instrument Alternator Pre-heater PMG Anti-damp and anti-corrosion treatment Anti-condensation heater Winding and bearing RTD 	<ul style="list-style-type: none"> Tools with the machine Extended range fuel tank Bunded fuel tank 	<ul style="list-style-type: none"> Low fuel level alarm Automatic fuel feeding system Fuel T-valves
Canopy	Lub oil system	Cooling System	Control Panel
<ul style="list-style-type: none"> Rental type Canopy Trailer 	<ul style="list-style-type: none"> Oil Pre-heater Oil temp sensor 	<ul style="list-style-type: none"> Front heat protection 	<ul style="list-style-type: none"> Remote control panel ATS Synchronizing controller Adjustable earth leakage relay

■ Control Panel

Configuration

- Emergency stop button
- Protection MCB
- Battery charger
- Integrated aviation plug
- ATS connection
- Digital control module

Features

- 3 phase generator set monitoring
- Support of engines equipped with electronic control unit
- Comprehensive diagnostic message
- Automatic or manual start/stop of the gensets
- Push buttons for simple control, lamp test
- Graphic back-lit LCD display
- Parameters adjustable via keyboard or PC
- Mains measurements (50HZ/60HZ)
- Generator measurements (50HZ/60HZ)
- Comprehensive shutdown or warning on fault condition
- 3 phase Generator protections
 - Over-/under voltage
 - Over-/under frequency
 - Current/voltage asymmetry
 - Over current/overload
- 3 phase AMF function
 - Over-/under frequency
 - Over-/under voltage
 - Voltage asymmetry
- Configurable analog inputs
- Battery voltage, engine speed (pick-up) measurement
- Configurable programmable binary inputs and outputs
- Warm-up and cooling functions
- Generator C.B. and Mains C.B. control with feedback and return timer
- RS232 interface
- Modem communication support
- Hours counter
- Sealed to Ip65
- Event log

Benefits

- Less wiring and components
- Integrated solution
- Less engineering and programming
- User friendly set-up and button layout
- Module can be configured to suit individual applications
- PC software for simplified configuration
- Wide range of communication capabilities

Operation conditions

- Operation temp: -20 °C to + 70 °C
- Storage temp: -30 °C to + 80 °C
- Operating humidity: 95% w/o condensation
- Vibration : 5-25Hz, ± 1.6 mm
5-100Hz, $a=4g$
- Shocks: $a= 500m/s^2$

Options

- Ethernet interface (Remote monitoring and control)
- GSM modem/wireless internet (Remote monitoring and control)
- RS232-RS485 Dual port interface
- Synchronizing control panel
- Distribution board with sockets kit and power busbar
- Battery trickle charge ammeter
- Earth leakage protection
- Earth fault protection
- Low fuel level alarm
- Low fuel level shutdown
- High fuel level alarm
- Fuel transfer system control
- Low coolant level shutdown
- High lube oil temp shutdown
- Overload via alarm switch on breaker
- Engine coolant heater controls
- Control panel heater
- Speed adjust switch
- Oil temp displayed on LCD screen
- Additional 8 inputs and outputs